



WALL-MOUNTED CERAMIC BATHROOM FAN HEATERS

# KOMPASS


EAN 8013557518586  
/ MASTERBOX 4 PCS

AVAILABLE COLOUR:  
**SILVER**



## DESIGN ULTRA-FLAT & SILVER FINISHING: A PIECE OF FURNISHING EVEN FOR YOUR BATHROOM

- > ELEGANT ULTRA-THIN DESIGN, SILVER FINISHING
- > ORIGINAL ROUNDED DISPLAY, BLUE LED
- > SLIM INFRARED REMOTE CONTROL
- > AUTOMATICALLY SWINGING FLAP
- > **SPECIAL FOR BATHROOM - IPX2 PROTECTION AGAINST FALLING OF WATER DROPS**
- > 3 HEATING MODES: ECO / COMFORT / ECO SMART
- > SUMMER VENTILATION
- > MIN. /MAX. POWER CONSUMPTION: 1000/2000W
- > ROOM TEMPERATURE CONTROL 10-49°C
- > ON / OFF TIMER 1-12 HOURS
- > WEEKLY TIMER
- > WINDOW SENSOR WITH SWITCH-OFF DEVICE
- > OVERHEATING SAFETY DEVICE






NEW!



LED DISPLAY

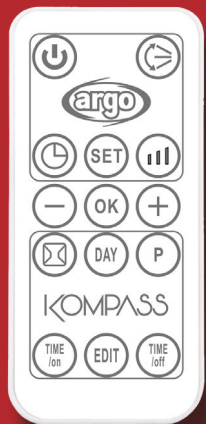

WALL-MOUNTED CERAMIC FAN HEATERS		KOMPASS	SLEEK	GHOST	CHIC SILVER
SPECIAL FUNCTIONS / APPLICATIONS		<ul style="list-style-type: none"> <li>• ECO SMART</li> <li>• WEEKLY TIMER</li> <li>• OPEN WINDOW SENSOR</li> <li>• IPX2-PROTECTION AGAINST FALLING OF WATER DROPS</li> </ul>	<ul style="list-style-type: none"> <li>• ECO SMART</li> <li>• WEEKLY TIMER</li> <li>• OPEN WINDOW SENSOR</li> <li>• IPX2-PROTECTION AGAINST FALLING OF WATER DROPS</li> </ul>	<ul style="list-style-type: none"> <li>• ECO SMART</li> <li>• WEEKLY TIMER</li> <li>• OPEN WINDOW SENSOR</li> <li>• IPX2-PROTECTION AGAINST FALLING OF WATER DROPS</li> </ul>	<ul style="list-style-type: none"> <li>• ECO SMART</li> <li>• WEEKLY TIMER</li> <li>• OPEN WINDOW SENSOR</li> </ul>
HEATING MODES		ECO/COMFORT/ECOSMART	ECO/COMFORT/ECOSMART	ECO/COMFORT/ECOSMART	ECO / COMFORT / ECOSMART
HEATING MODES / POWER LEVELS	NO.	3	3	3	3
HEATING VOLUME	M <sup>3</sup>	60	60	60	60
SUMMER VENTILATION		•	•	•	•
WALL-MOUNTED FIXED INSTALLATION		•	•	•	•
DIGITAL THERMOSTAT		•	•	•	•
ON / OFF TIMER		1-12H	1-12H	1-12H	1-12H
AUTOMATIC DEFLECTORS		•	•	•	•
INFRARED REMOTE CONTROL		•	•	•	•
CAPACITIVE SENSOR CONTROLS		•	•	•	•
LED DISPLAY		•	•	•	•
FORCED VENTILATION		•	•	•	•
TANGENTIAL FAN		•	•	•	•
CERAMIC HEATING ELEMENT		•	•	•	•
POWER SUPPLY	V/F/HZ	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
POWER INPUT	W	1000/2000	1000/2000	1000/2000	1000/2000
PTC PROTECTION		•	•	•	•
OVERHEATING SAFETY DEVICE		•	•	•	•
DIMENSIONS (H/W/D)	MM	185/560/117	185/560/115	185/560/118	202/615/123
WEIGHT	KG	2,6	2,5	2,48	3,6