

# Data sheet

## BenQ BH2401

### Bar Type Display

- Resolution 1920 x 190
- Android 6.0 OS System
- Landscape / Portrait Mode
- Brightness 1000 cd/m<sup>2</sup>
- X-Sign Support
- USB plug & play



HDMI

#### Panel

Model : BH2401  
Art. No. / EAN Code : 9H.F58PG.NA1 / 471 8755 07650 3  
Typ : 59,94 cm / 23,6  
Native Resolution : 1920 x 190 / 16:1,6  
Panel : 8 Bit  
Pixel pitch : 0,31 mm / 0,31 mm  
Panel surface : Anti Glare  
Max. colors : 16.7 million

Backlight : Edge LED  
Viewing angle H / V : 178° / 178°  
Contrast (static) : 3.000:1  
Brightness : 1000 cd/m<sup>2</sup>

#### Connection

Response time : 8 ms  
Input : Power AC, HDMI, 2x USB, RJ45, RS232

Functions : Image setting, Source Control, Volume Control, Sharpness Enhancement, HDMI-HDCP, OTA Update, USB-Playback, X-Sign, Wake Up HDMI/LAN

#### Extra

Speaker : 2W x2  
Light life typ. : 55.000 h  
Operation time hour per day : 24/7  
Display Orientation : Landscape / Portrait

#### Energy

Power supply : external  
Voltage for operation : 100 ~ 264 VAC ; 50 / 60 Hz  
Power consumption max. / typ. : < 19 W / 13 W  
Sleep mode : < 0.5 W

#### Certification

Safety : CE

#### Environment

Operation : + 0 ~ +50°C ; 20 ~ 80% air humidity

Storage : -25 ~ +60°C ; 20 ~ 80% air humidity


#### Characteristic

weight net. : 3.4 kg  
Housing color : black  
Bezel width top/bottom/left/right : 16 / 16 / 16 / 16 mm  
Dimension (W x H x D) : 630 x 90 x 46 mm  
VESA Mounting holes : 430 x 60 mm / M4 x 10L  
Accessories : Remote Controller, Power cable, Power adapter, HDMI cable,  
Warranty term : 3 years OSE (on site exchange)



# Data sheet

## Input/output terminals

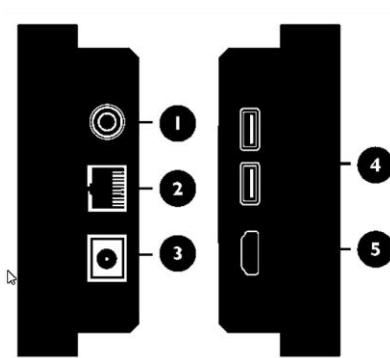

### 1 RS232 (3.5mm)

Receives control signals from a computer or another display.

### 3 DC IN

Connects to a power outlet via the supplied power cord and adapter.

### 5 HDMI IN

Receives HDMI signals from an external device.

### 2 LAN

Connects to the RJ-45 port on your Ethernet or router.

### 4 USB(2.0)

Accesses multimedia files on USB drives directly.

### 7 Line IN

Inputs audio signals from an external device.

## Dimension

