

Data sheet

BenQ BH2801N

Bar Type Display

- Resolution 1920 x 360
- Android 6.0 OS System
- Landscape / Portrait Mode
- Brightness 1000 cd/m²
- X-Sign Support
- USB plug & play



HDMI

Panel

Model : BH2801N
Art. No. / EAN Code : 9H.F61PG.NA2/ 471 8755 07993 1
Typ : 71,12 cm / 28" IPS Technology
Native Resolution : 1920 x 360 / 16:3
Panel : 8 Bit
Pixel pitch : 0,36 mm / 0,36 mm
Panel surface : Anti Glare
Max. colors : 16.7 million

Backlight : Edge LED
Viewing angle H / V : 178°/ 178°
Contrast (static) : 3.000:1
Brightness : 1000 cd/m²
Response time : 8 ms

Connection

Input : Power AC, HDMI, 2x USB, RJ45, RS232

Functions : Image setting, Source Control, Volume Control, Sharpness Enhancement, HDMI-HDCP, OTA Update, USB-Playback, X-Sign, Wake Up HDMI/LAN

Extra

Speaker : 1W x2
Light life typ. : 55.000 h
Operation time hour per day : 24/7
Display Orientation : Landscape / Portrait

Energy

Power supply : external
Voltage for operation : 100 ~ 264 VAC ; 50 / 60 Hz
Power consumption max. / typ. : 29 W / 20 W
Sleep mode : < 0.5 W

Certification

Safety : CE

Environment

Operation : + 0 ~ +50°C ; 20 ~ 80% air humidity

Storage : -25 ~ +60°C ; 20 ~ 80% air humidity

Characteristic


weight net. : 5.3 kg
Housing color : black
Bezel width top/bottom/left/right : 15 / 15 / 15 / 15 mm
Dimension (W x H x D) : 729 x 162 x 46 mm
VESA Mounting holes : 400 x 100 mm / M4 x 10L
Accessories : Remote Controller, Power cable, Power adapter, HDMI cable,
Warranty term : 3 years OSE (on site exchange)



Because it matters

Data sheet

Input/output terminals

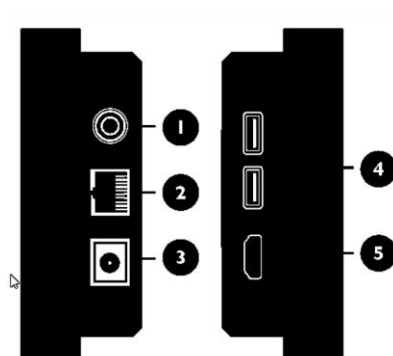

1 RS232 (3.5mm)

Receives control signals from a computer or another display.

2 LAN

Connects to the RJ-45 port on your Ethernet or router.

3 DC IN

Connects to a power outlet via the supplied power cord and adapter.

4 USB(2.0)

Accesses multimedia files on USB drives directly.

5 HDMI IN

Receives HDMI signals from an external device.

7 Line IN

Inputs audio signals from an external device.

Dimension

