


Data sheet

BenQ BH3801D

Bar Type Display

- Double-Side Bar Type
- Resolution 1920 x 600
- Android 6.0 OS System
- Landscape / Portrait Mode
- X-Sign Support

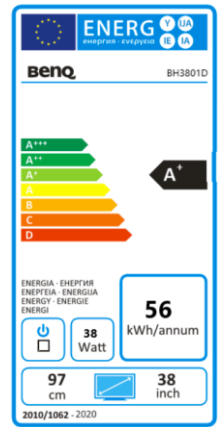

HDMI

Panel

Model : BH3801D
Art. No. / EAN Code : 9H.F5XPG.NA1/ 471 8755 07981 8

Typ : 96,52 cm / 38" IPS Technology
Native Resolution : 1920 x 600 / 16:5
Panel : 8 Bit
Pixel pitch : 0,48 mm / 0,48 mm
Panel surface : Anti Glare
Max. colors : 16.7 million

Backlight : Edge LED
Viewing angle H / V : 178° / 178°
Contrast (static) : 1.000:1
Brightness : 700 cd/m²
Response time : 8 ms

Connection

Input : Power AC, HDMI, 2x USB, RJ45, RS232

Functions : Image setting, Source Control, Volume Control, Sharpness Enhancement, HDMI-HDCP, OTA Update, USB-Playback, X-Sign, Wake Up HDMI/LAN

Extra

Speaker : 1W x4
Light life typ. : 55.000 h
Operation time hour per day : 24/7
Display Orientation : Landscape / Portrait

Energy

Power supply : external
Voltage for operation : 100 ~ 264 VAC ; 50 / 60 Hz
Power consumption max. / typ. : 56 W / 38 W
Sleep mode : < 0.5 W

Certification

Safety : CE

Environment

Operation : + 0 ~ +50°C ; 20 ~ 80% air humidity
Storage : -25 ~ +60°C ; 20 ~ 80% air humidity


Characteristic

weight net. : 11 kg
Housing color : black
Bezel width top/bottom/left/right : 14 / 14 / 15 / 15 mm
Dimension (W x H x D) : 965 x 332 x 80 mm
VESA Mounting holes : On the site, 10 – M6 x 12L
Accessories : Remote Controller, Power cable, Power adapter, HDMI cable,
Warranty term : 3 years OSE (on site exchange)



Data sheet

Input/output terminals

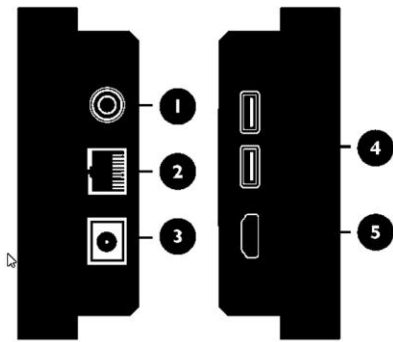

1 RS232 (3.5mm)

Receives control signals from a computer or another display.

2 LAN

Connects to the RJ-45 port on your Ethernet or router.

3 DC IN

Connects to a power outlet via the supplied power cord and adapter.

4 USB(2.0)

Accesses multimedia files on USB drives directly.

5 HDMI IN

Receives HDMI signals from an external device.

7 Line IN

Inputs audio signals from an external device.

Dimension

