



label 料号: label Part NO.:	
J40G0007608XXX	
客户 Customer	lenovo
型号 Model	G27e-20(A21270FG1)
销向 Sales Area	EU
安规签核Safety parts:	
Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/>
内销中文字体要求高度1.8mm以上	
Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/>
针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.	
条码印刷: barcode print:	
1. 所有条码读码等级: C级及以上, 客户有特殊要求除外;	
REVISION	
VERSION A	
版本变更说明: Version Changed Description:	
备注Remark:	
XF.LIN 2021-06-11	

NOTE:

- 印刷如上图
Printing as the drawing
- 尺寸:具体见上图所示(公差: +/-0.2mm)
Dimension:as the above drawing(Tolerance:+0/-0.2mm)
- 材质: 80g铜版纸带不干背胶,表面上光油,贴于纸箱上
- 颜色: 如图所示
Color:See the drawing
- 粘力: 将label切成25mm宽,一端粘贴于钢板上,以180°方向的力拉胶带另一端,所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 正常耐温测试: 在钢板上耐温范围为-20~100°C,在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C,在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
- 耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面): 温度-20~65°C,湿度30~90%,时间96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
- 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象
Printing ink can not have overflow and printing color can not be uneven etc.
- 其它测试要求详见(FQ-背胶类产品测试检验规格)

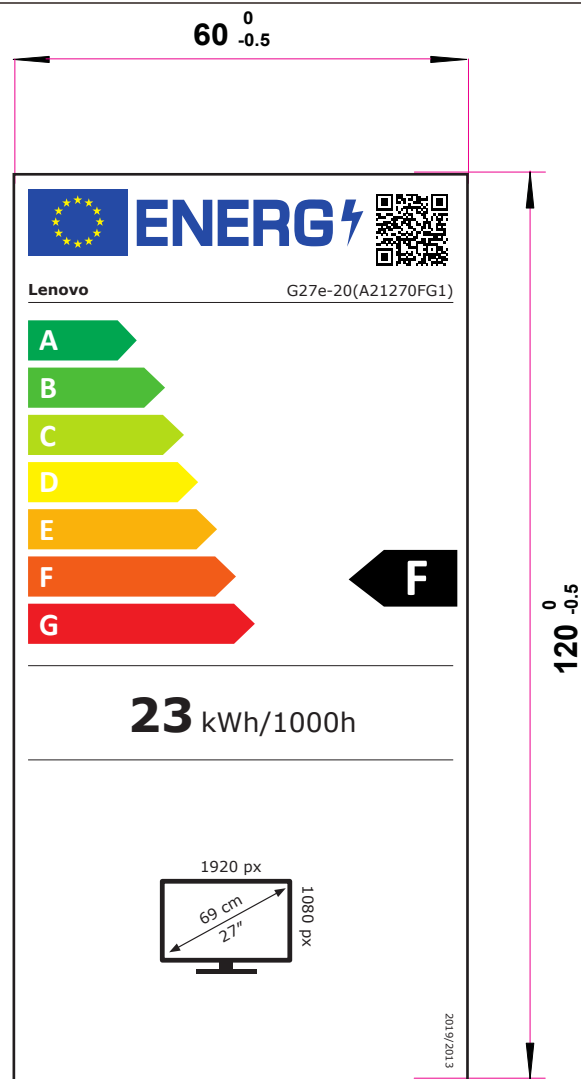

COLOR GUIDE

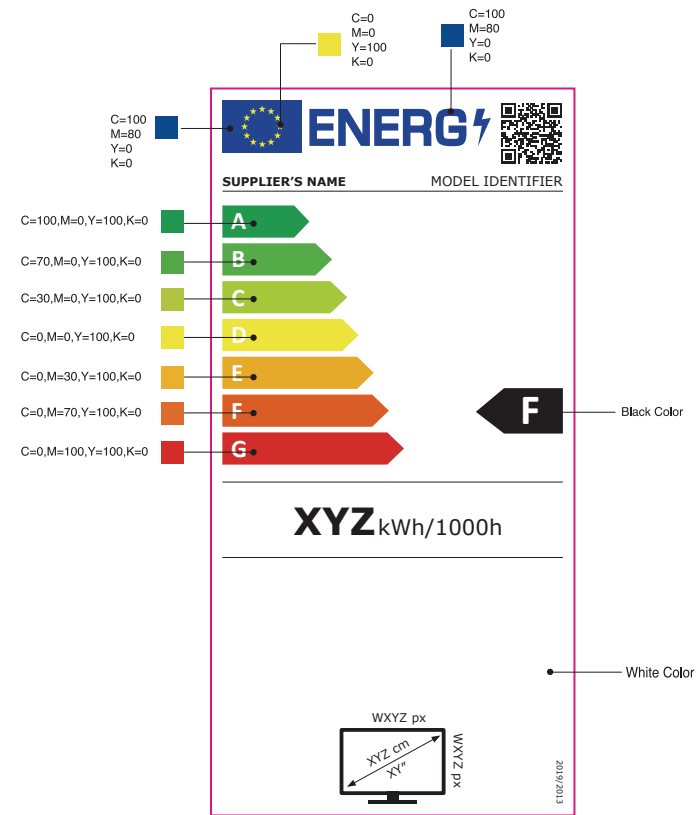

- 根据 TPV 推行 RoHS 的有关规定,所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- 1)According to the rule about RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS
- 2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.